

TOSHIBA

FROM STUNNING 3D ENTERTAINMENT TO SHARP BUSINESS PRESENTATIONS

次元を操る新たな光



TOSHIBA NP15A 3D PROJECTOR SERIES



3D PROJECTION SUPPORT

for lifelike
entertainment



3,000 ANSI LUMENS

clear projections
under a variety of
lighting conditions*



AUTO VERTICAL KEystone


corrects screen's vertical
distortion automatically
in seconds




BUILT-IN LASER POINTER

on Remote Control

SPECIFICATIONS

| Model | NPS15A | | | |
|---|--|-------------------|-------------------|-------------------|
| Native Resolution | SVGA 800 x 600 | | | |
| Aspect Ratio | 4:3 | | | |
| Chip | 0.55" DMD 1 chip 2xLVDS (DarkChip3), DDP4421, S450 type | | | |
| Brightness (ANSI Lumens) | 3,000 | | | |
| Contrast Ratio | 10,000:1 | | | |
| Uniformity (Typical / Min) | 80% / 65% | | | |
| Projection Screen Size (Diagonal) | 27.46" to 302.8" | | | |
| Projection Distance | 1.2 to 12m | | | |
| Throw Ratio | 1.95:1 / 2.15:1 | | | |
|  | Projection size (inches) | Wide distance (a) | Tele distance (a) | Offset height (H) |
| | | (m) | (m) | (cm) |
| | 60 | 2.38 | 2.62 | 13.72 |
| | 80 | 3.17 | 3.50 | 18.29 |
| 100 | 3.96 | 4.37 | 22.86 | |
| Projection Lens | Focal length 21.8 to 24mm | | | |
| F-number | F2.41 to F2.55 | | | |
| Zoom | 1.1x Mechanical Optical Zoom | | | |
| Lamp | 190W | | | |
| Lamp Life (Eco/Normal) | 6,000hrs / 5,000hrs | | | |
| Connectivity | HDMI-in v1.4b x 1 VGA-in D-sub 15pin female connector x 1 Composite video-in RCA x 1 S-video in Mini DIN 4-pin x 1 Audio-in 3.5mm x 1 VGA-out / Component-in D-sub 15pin female connector x 1 | | | |
| Control / Firmware update | One Min DIN 3-pin RS-232 port x 1 | | | |
| Speaker | 2W monoaural | | | |
| Audible Noise (Normal / Eco) | 34 / 29dB | | | |
| Dimensions (Excluding Protrusions) | 286.3 x 192 x 91.6mm | | | |
| Weight | 2.31kg | | | |
| 3D Formats | Top-and-bottom, Frame Packing, Side-by-side, Frame Sequential | | | |
| Vertical keystone | Auto +/- 15 degrees | | | |
| Power Consumption (Eco / Normal / Standby) | 205W / 245W / <0.5W | | | |
| Operating Temperature and Altitude | For 5°C to 40°C: 0 to 2,500 ft; For 5°C to 35°C: 2,500 to 5,000 ft; For 5°C to 30°C: 5,000 to 10,000 ft | | | |
| Operating Temperature | 5 to 40°C | | | |
| Built-in laser pointer on remote control | Yes | | | |
| Included accessories | Remote Control with laser pointer, VGA Cable, AC Power Cord, Carrying Case, Lens Cap, User's Guide on CD-ROM, Quick Start Guide and Warranty leaflet | | | |
| Warranty (local) | 3-Year standard limited warranty, excluding lamps which comes with 1-Year standard limited warranty or 1000 hours, whichever comes first. | | | |

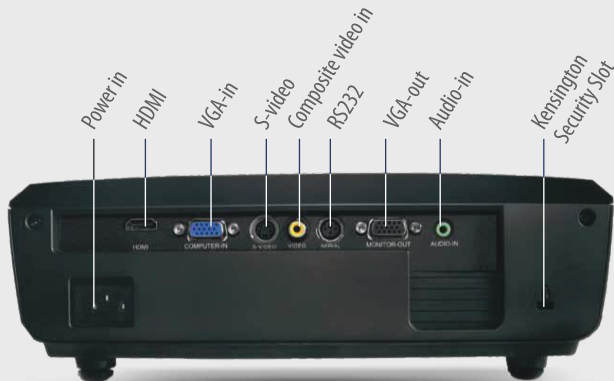

Optional Accessories

- Replacement Lamp
- 3D glasses



Distributed by

For more information, please visit <http://toshiba-business.com>

© 2013 Toshiba Singapore Pte Ltd, Digital Products & Services (South and Southeast Asia Regional Headquarters). All products and names mentioned are property of their respective owners. While Toshiba has made every effort at the time of printing to ensure the accuracy of the information provided herein, product specifications, configurations, warranty, pricing, system/component/options availability are all subject to change without prior notice. Toshiba will not be liable for editorial, pictorial, and typographical errors. All rights reserved. RCB No. 197401688Z. Marketing Part No: TSP-MKG-PDT-235



International Office Machines Ltd.

Corporate Office
Ranks Business Centre (3rd Floor), KA 218/1 Pragati Sarani, Kuril, Dhaka 1229.
Hotline: 09611858585, Tel: 8418523 | Fax: 8417589 | E-mail: info@iomltd.com

Branches
Motijheel- 9564618, 01816256418 | Chittagong- 613705, 01714084429
Bogra- 65531, 01711890615 | Khulna- 732372, 01716749065 | Sylhet- 712240, 01711160285

